



| | | | | |
|--------------------|-----------------------|------------------|---|---|
| Efficiency >93% | 405W/in ³ | INPUT 2:1/4:1 | Remote ON OFF | Full Metal Package |
| 4.5Mhrs MTBF | Open Frame Package | OVP | OTP | OCP |
| | | | | |
| | | |  |  |



The U16 series power module provides 150W maximum outputs with industry standard sixteenth brick pin assignment. The efficient SR stage is combined with patented “Buck-reset Forward” topology that would reduce power loss to achieve 405W/in³ power density. The multi-layer single side circuit board design plus the fully metal-enclosed package would enhance the thermal performance and improve its reliability. The module is designed for Telecom, Servers, Networking equipments and other industry applications that use a 24V or 48V input bus.


PART NUMBER SYSTEM (Total height = standoff height + module thickness) *Preliminary Data Sheet*

| U16 | 48 | 120 | a | b | c | d | - | XX | XX | X |
|-------------|---|---|----------------------------|---|---|--|---|----------------------------|----------------------------|---------|
| Series Name | Rated Input | Rated Output | Enable Logic | Pin Length | Standoff Height | Base-Plate / module thickness | | Setting | Suffix | Version |
| U16 | 18=9V~36V 24=18V~36V 36=18V~75V 48=36V~75V | Unit: 0.1V Increments 120= 12V 033= 3.3V | P: Positive N: Negative | --: SMD 0: 0.12" 1: 0.16" 2: 0.20" 3: 0.24" | --: SMD 0: 0.02" 1: 0.08" 2: 0.16" | N: Open Frame / 0.35" E: Metal Enclosed / 0.40" M: Molding / 0.40" | - | For customer function only | For marketing purpose only | |


MODEL LIST (Contact to factory for 4X input models or special specifications)

| Part Number * | Maximum Input | Maximum Output | Efficiency | Part Number * | Maximum Input | Maximum Output | Efficiency |
|--------------------|---------------|----------------|------------|--------------------|---------------|----------------|------------|
| U1624120abcd-XXXXX | 18V~36V 161W | 12.0V/12A 144W | 92% | U1648120abcd-XXXXX | 36V~75V 186W | 12.0V/14A 168W | 93% |
| U1624050abcd-XXXXX | 18V~36V 141W | 5.0V/25A 125W | 91% | U1648050abcd-XXXXX | 36V~75V 168W | 5.0V/30A 150W | 92% |
| U1624033abcd-XXXXX | 18V~36V 115W | 3.3V/30A 99W | 89% | U1648033abcd-XXXXX | 36V~75V 132W | 3.3V/35A 115W | 90% |
| U1624025abcd-XXXXX | 18V~36V 89W | 2.5V/30A 75W | 87% | U1648025abcd-XXXXX | 36V~75V 102W | 2.5V/35A 88W | 88% |

REFERENCED THERMAL IMAGES

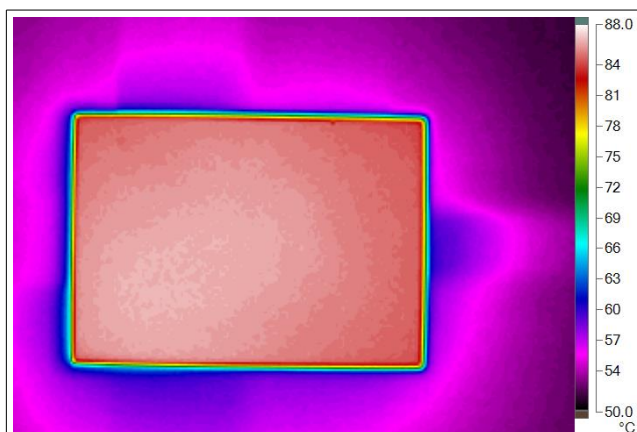

U1648033N10E-20 (I_o= 20A@50°C/200LFM)

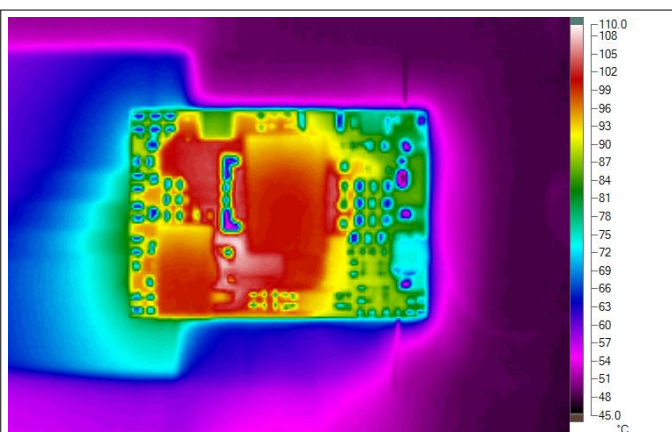

U1648033N10N-20 (I_o= 16.7A@50°C/200LFM)

SPECIFICATIONS**Absolute Maximum Ratings**

| | | |
|---------------------|--|---|
| Temperature | Operation Storage | -40°C to +110°C -55°C to +125°C |
| Input Voltage Range | Operation: 18V/24V Models 36V/48V Models Transient (100mS): 18V/24V Models 36V/48V Models | -0.5V to +40Vdc -0.5V to +80Vdc 50V Maximum 100V Maximum |
| Isolation Voltage | Input to Output Input to Case Output to Case | 2.0KV Minimum 1.0KV Minimum 1.0KV Minimum |
| Remote Control | | -0.5V to +12Vdc |

General Parameters

| | | |
|-----------------------|------------------------------------|---|
| Conversion Efficiency | Typical | See table |
| Switching Frequency | Typical | 400KHz |
| MTBF | Belcore TR-332 issue 6 | 4.50×10 ⁶ hrs @GB/25°C (U1648050abcd-25XXX) |
| OTP | T _{AVG} or T _C | 110°C ±5°C for standard setting |
| Weight | Packaging related | 11~28g |

Control Functions

| | | |
|-------------------------------------|-------------------------|-------------------------------|
| Remote Control | Logic High Logic Low | +3.0V to +6.5V 0V to +1.0V |
| Input Current of Remote Control Pin | | -0.5mA ~ +1.5mA |




Input


| | | |
|---------------------------|--|--|
| Operation Voltage Range | 18V(24V) Models 36V(48V) Models | +9V(+18V) to +36Vdc +18V(+36V) to +75Vdc |
| Reflected Ripple Current | L _{EXT} = 10uH | 20mA rms/60mA p-p |
| Power ON Voltage Ranges | 18V Models 24V/36V Models 48V Models | +8.5V to +9.0Vdc +17.0V to +18.0Vdc +34.0V to +36.0Vdc |
| Power OFF Voltage Ranges | 18V Models 24V/36V Models 48V Models | +7.8V to 8.3Vdc +15.6V to +16.6Vdc +31.2V to +33.2Vdc |
| Off State Input Current | V _{NOM} | 6mA Max |
| Latch-State Input Current | V _{NOM} | 8mA Max |
| Input Capacitance | 18V/24V Models 36V/48V Models | 20.0uF Max 14.0uF Max |

Output

| | | |
|--------------------------------|------------------------------|-------------------------|
| Voltage Accuracy | Typical | ±1.0% |
| Line Regulation | Full Input Range | ±0.2% |
| Load Regulation | 0%~100% | ±0.2% |
| Temperature Drift | -40°C ~100°C | ±0.03%/°C |
| Output Tolerance Band | All Conditions | ±4% |
| Ripple & Noise (20MHz) | Peak-Peak (RMS) | 3% (1%) V _O |
| Over Voltage Protection | V _{NOM} , 10% Load | 115~130 %V _O |
| Output Current Limits | V _{NOM} | 108%~125% |
| Voltage Trim | V _{NOM} , 10% Load | ±10% |
| Input Ripple Rejection (<1KHz) | V _{NOM} , Full Load | -50dB |
| Step Load (2.5A/μS) | 50%~75% Load | ±6%Vo/500μS |
| Start-Up Delay Time | V _{NOM} , Full Load | 20mS/250mS |

TYPICAL WAVES AND CURVES

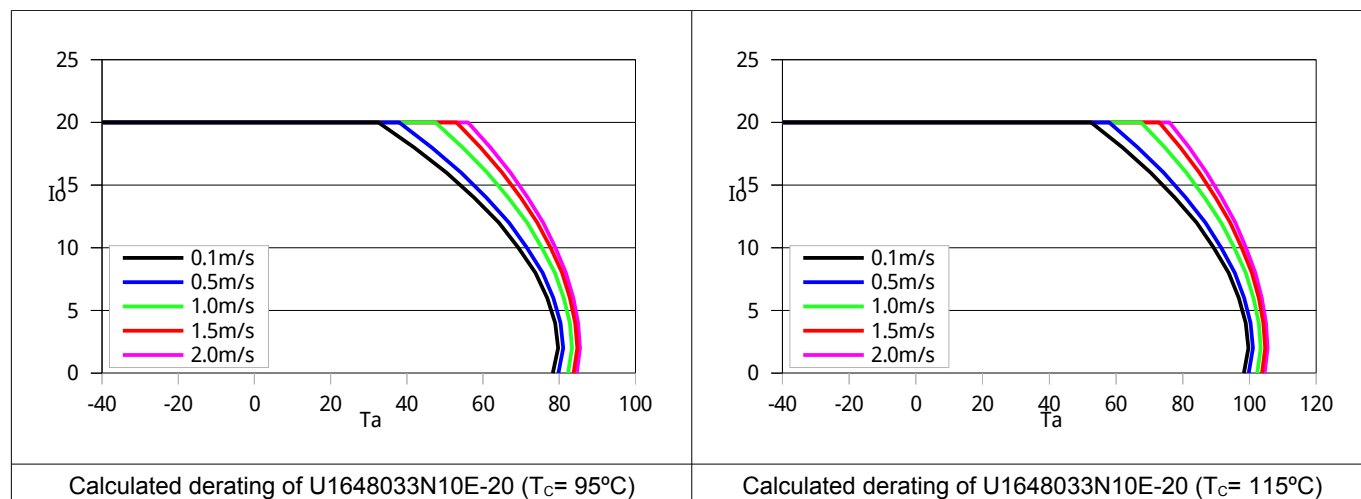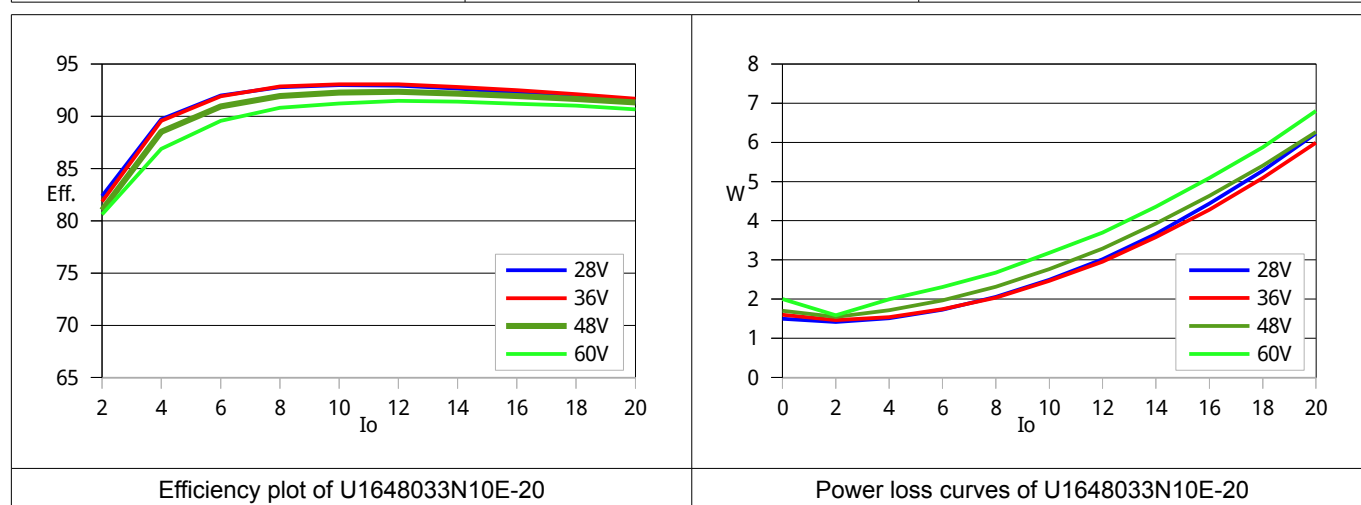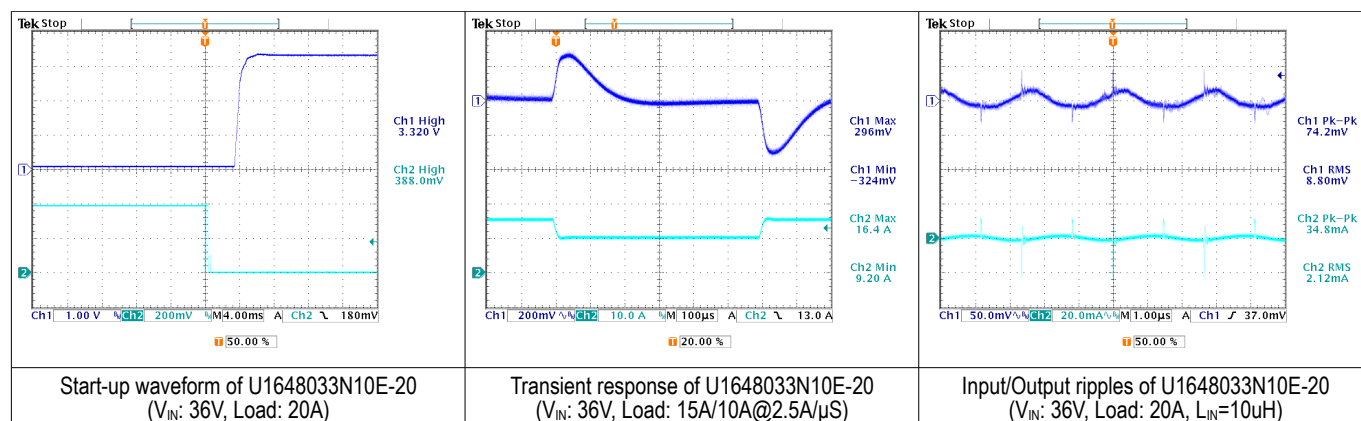

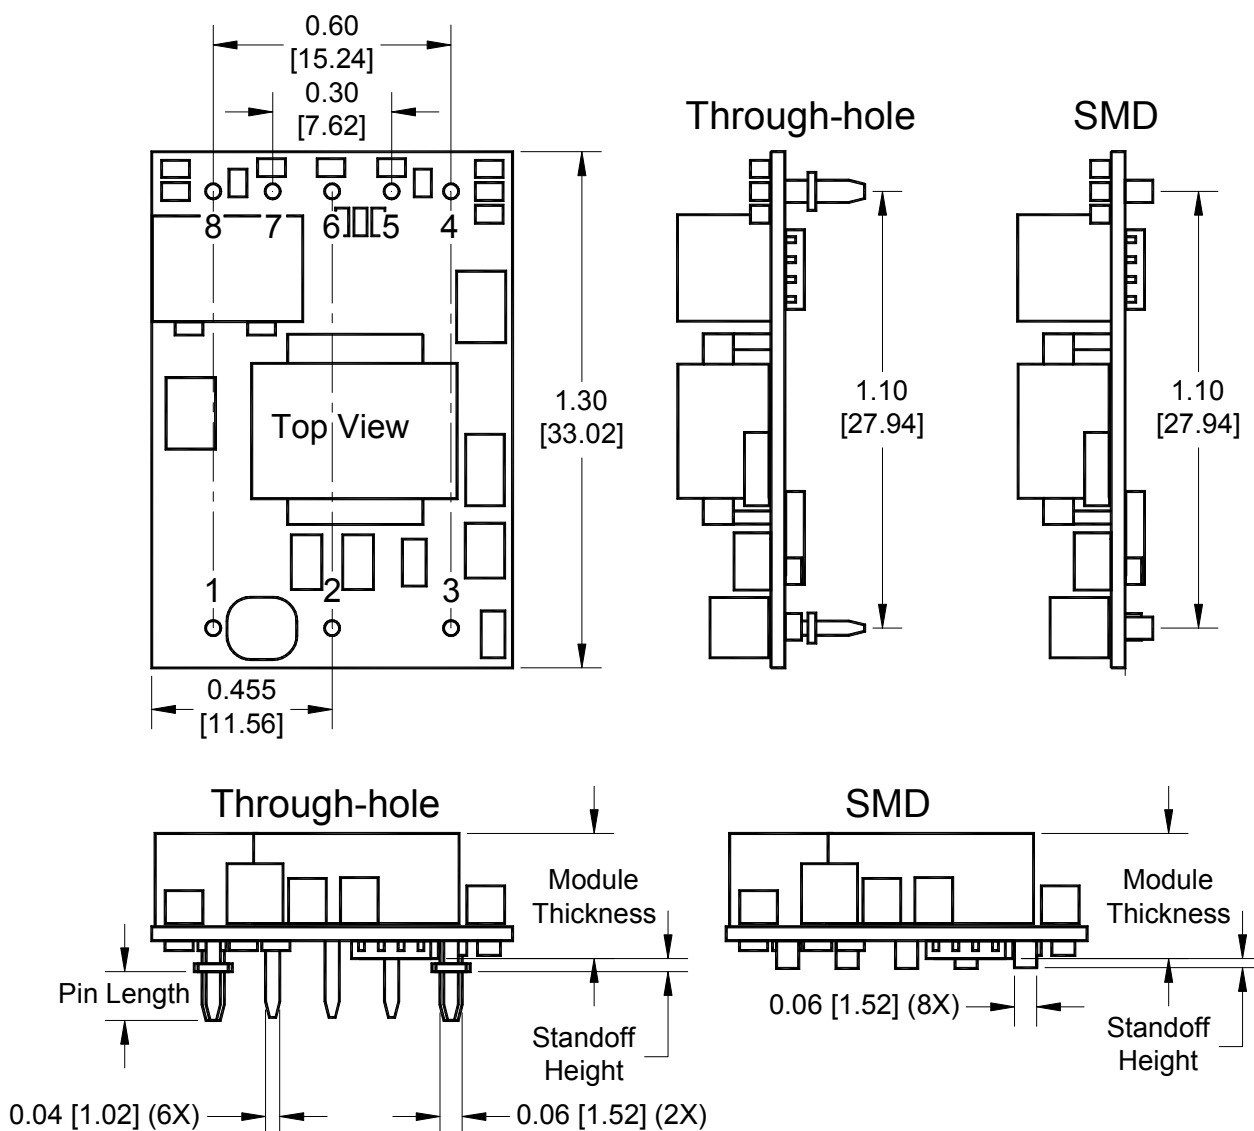OPEN FRAME

Dimensions and Pin Connections

| Designation | Function Description | Pin # |
|-------------|---|-------|
| +IN | Positive input | 1 |
| PC | Remote control. To turn-on and turn-off output. | 2 |
| -IN | Negative input | 3 |
| -Vo | Negative output | 4 |
| -S | Negative remote sense | 5 |
| TRIM | Output voltage adjust | 6 |
| +S | Positive remote sense | 7 |
| +Vo | Positive output | 8 |

Dimensions: inches (mm)

Tolerances: .xx±0.02 (.x±0.5)

.xxx±0.01 (.x±0.25)


Weight: 11g / Sixteenth Brick

Base-plate: None

Maximum torque: NA

Pin material: Copper alloy or Brass

Pin plating: Golden over Nickel

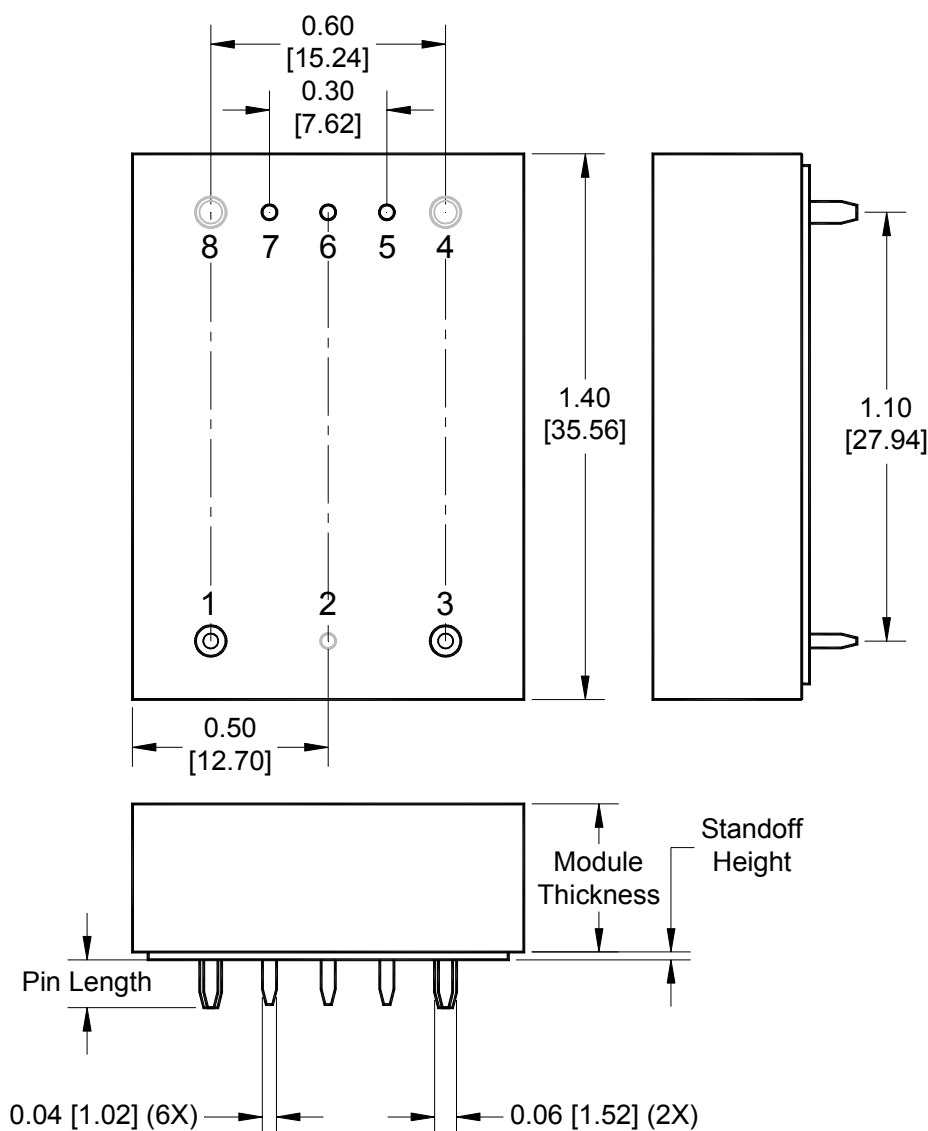METAL ENCLOSED

Dimensions and Pin Connections

| Designation | Function Description | Pin # |
|-------------|---|----------|
| +IN | Positive input | 1 |
| PC | Remote control. To turn-on and turn-off output. | 2 |
| -IN | Negative input | 3 |
| -Vo | Negative output | 4 |
| -S | Negative remote sense | 5 |
| TRIM | Output voltage adjust | 6 |
| +S | Positive remote sense | 7 |
| +Vo | Positive output | 8 |

Dimensions: inches (mm)

Tolerances: .xx±0.02 (.x±0.5)
.xxx±0.01 (.x±0.25)

Weight: 28g


Base plate: None-conductive

Mounting inserts: None

Maximum torque: NA

Pin material: Copper alloy or Brass

Pin plating: Gold over Nickel

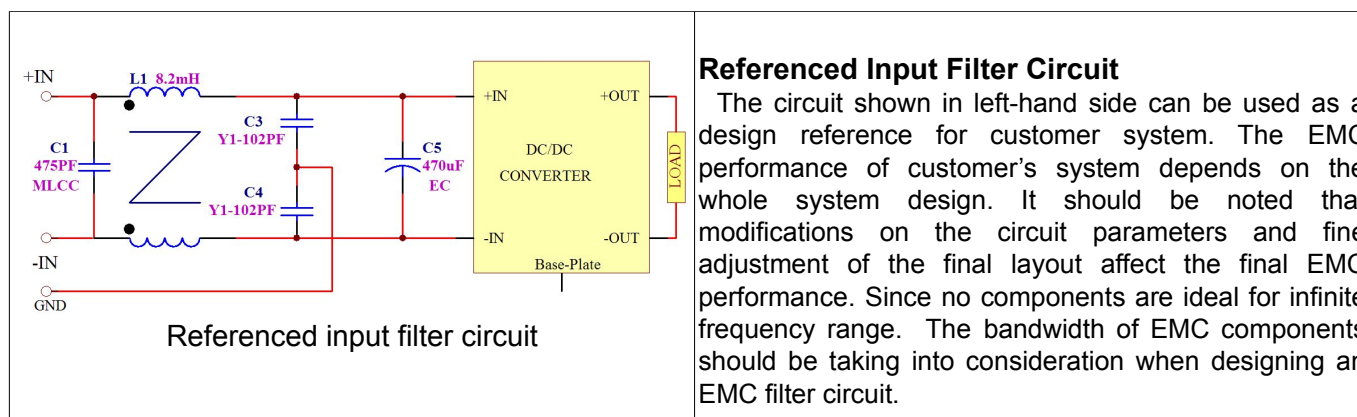REFERENCED EMC CIRCUIT**EXTERNAL OUTPUT CAPACITANCE**

For reducing the ripple/noise voltage on the load or the peak voltage deviation caused by a step load, additional capacitor is required for decoupling the unwanted voltage components from the load. Since the step load performance is mainly dominated by the feedback loop performance, which also affected by the additional output capacitance. To put some low-bandwidth high capacitance Electrolytic capacitors very close to the power module help nothing and even introduces unwanted effects on the feedback performance, sinking or sourcing surge current damaging the power module. Glary suggest to put a low ESR capacitor with simply sufficient capacitance to handle the short duration high frequency component of ripple/noise or voltage peak deviation, and the capacitor needs to be as close as possible to the load. Do not add capacitor for no reason.

NOTE:

1. It is recommended that the input should be protected by fuses or other protection devices.
2. All specifications are typical at nominal input, full load and 25°C unless otherwise noted.
3. Specifications are subject to change without notice.
4. Printed or downloaded datasheets are not subject to Glary document control.
5. Product labels shown, including safety agency certificates, may vary based on the date of manufacture.
6. Information provided in this documentation is for ordering purposes only.
7. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications, which necessitate specific safety and regulatory standards other than the ones listed in this datasheet.

IMPORTANT

- ※ General specifications and the performances are related to standard series only, no special customer specification display here except requested items.
- ※ In order to secure effective usage of converter and the validity of Glary's service and warranty coverage, please refer to the application notes for general usage. For needs of usage beyond the application notes, please contact to Glary headquarter or our regional sales representative office for help.